


# Vulmproeko UV

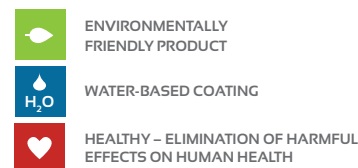

## Product description:

**Vulmproeko UV** is a water-based pigmented topcoat cured by UV radiation designed for spray application.

## Use:

**Vulmproeko UV** is used for finishing of parts for furniture, mouldings, doors and other wood products for indoor use as a primer and top spray. It is physically cured after hot drying but spatially cross-linked, chemically resistant and stackable only after UV curing.

## Product data:

type:	acrylic dispersion, UV cured top coat
colour:	according to customer's choice
solids content:	approx. 44 – 46 % depending on colour
specific weight:	approx. 1,15 – 1,2 g/cm <sup>3</sup> depending on colour
supplied viscosity:	30 – 35 sec/D4/23 °C depending on colour
shelf life:	12 months in original packaging in dry conditions at the temperature of 8 – 35 °C protect from frost

## Application data:

amount applied:	2x base from 90 – 110 g/m <sup>2</sup> top 80 – 120 g/m <sup>2</sup>
application viscosity:	25 – 30 sek/D4/23 °C
dilution:	water

## Application methods:

spray

## Cleaning of tools:

Immediately after use, with water, alcohol.

## Curing:

**Vulmproeko UV** dries in tunnels with air circulation or by UV radiation using infra-red gallium or mercury lamps.  
For specific information concerning the conditions on your device, please contact the manufacturer.

## Safety:

**Vulmproeko UV** – when handling, proceed in accordance with the general safety measures, follow the safety instructions on the packaging labels and on safety data sheets. Data, specifications, directions and recommendations given in this technical data sheet are based on experience gained in modeling of supposed ways of applications, or under specially defined conditions. Their accuracy, completeness or appropriateness under the actual conditions of any intended use is not guaranteed and must be determined by the user. The manufacturer and distributor are not responsible for the results achieved, loss, direct or consequential damages arising from failure to comply with the recommended use of the product, which go beyond the conditions herein.